



Frosta 480 is an elegantly designed decorative luminaire for ceilings and walls. It is suitable for homes as well as hotels, restaurants, etc. The diffuser provides a perfectly even light distribution with an aura of light in the ceiling.


Easy installation with holes to fit all know ceiling boxes. For concealed or visible cabling.






Dimmable with phasecut and DALI / push. Light levels can also be adjusted with dip switches on the driver. Can be made with SensorDim on request, and Frosta 480 can be made with emergency (1 hour). A pendant kit is sold separately, and fits both the phasecut and DALI / push version.

Frosta 480

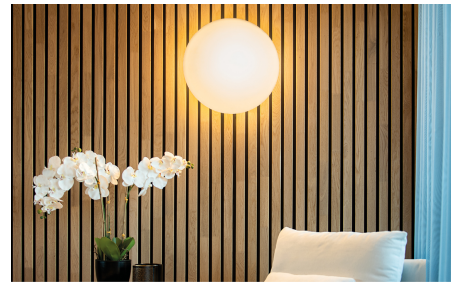

Product- and environment images





Article	Protection	Control gear	Mounting/Connection	Dimensions
2700K				
 <p>211700 Frosta 480 White 2200lm 2700K Ra>80 Trailing edge dimming 17W LED 129 lm/W SDCM:3 L80/B10>100,000, L90>60,000 Beam: 117°, Direct/Indirect 92/8%, Acrylic diffuser</p>	<p>Class II IP20 IK08</p>	<p>Trailing edge dimming</p>	<p>Surface, Indoor Screwless terminal block</p>	<p>Ø480 x H90</p>
3000K				
 <p>211701 Frosta 480 White 2290lm 3000K Ra>80 Trailing edge dimming 17W LED 135 lm/W SDCM:3 L80/B10>100,000, L90>60,000 Beam: 117°, Direct/Indirect 92/8%, Acrylic diffuser</p>	<p>Class II IP20 IK08</p>	<p>Trailing edge dimming</p>	<p>Surface, Indoor Screwless terminal block</p>	<p>Ø480 x H90</p>
 <p>211707 Frosta 480 White 3150lm 3000K Ra>80 DALI / Push Dim 24W LED 131 lm/W SDCM:3 L80/B10>100,000, L90>60,000 Beam: 117°, Direct/Indirect 92/8%, Acrylic diffuser</p>	<p>Class II IP20 IK08</p>	<p>DALI / Push Dim</p>	<p>Surface, Indoor Screwless terminal block</p>	<p>Ø480 x H90</p>
 <p>211713 Frosta 480 White 2290lm 3000K Ra>80 Sensor Dim 17W LED 135 lm/W SDCM:3 L80/B10>100,000, L90>60,000 Beam: 117°, Direct/Indirect 92/8%, Acrylic diffuser</p>	<p>Class II IP20 IK08</p>	<p>Sensor Dim</p>	<p>Surface, Indoor Screwless terminal block</p>	<p>Ø480 x H90</p>
4000K				
 <p>211702 Frosta 480 White 2370lm 4000K Ra>80 Trailing edge dimming 17W LED 139 lm/W SDCM:3 L80/B10>100,000, L90>60,000 Beam: 117°, Direct/Indirect 92/8%, Acrylic diffuser</p>	<p>Class II IP20 IK08</p>	<p>Trailing edge dimming</p>	<p>Surface, Indoor Screwless terminal block</p>	<p>Ø480 x H90</p>

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 211708 Frosta 480 White 3220lm 4000K Ra>80 DALI / Push Dim 24W LED 134 lm/W SDCM:3 L80/B10>100,000, L90>60,000 Beam: 117°, Direct/Indirect 92/8%, Acrylic diffuser	Class II IP20 IK08	DALI / Push Dim	Surface, Indoor Screwless terminal block	Ø480 x H90

Accessories

 606094 Disc/Frosta White Pendant Adapter	L5000 x W102 x H22
 606095 Disc/Frosta Black Pendant Adapter	L5000 x W102 x H22